


Please fill in your details and measure as accurately as possible in millimetres, see the 'view of opening diagram' below, andsd put the sizes in the boxes 1-5 below.

Name:.....
 Address:.....


 Postcode:.....
 Tel no: Mobile:
 Email: Fax:.....

Understanding the different installation options


Face fix (fixing behind the opening)

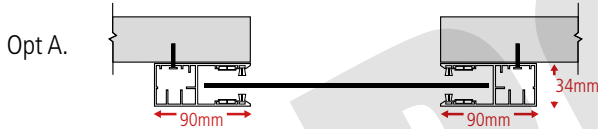



Reveal fix (fixing between the opening)




Combination of face fix and reveal fix

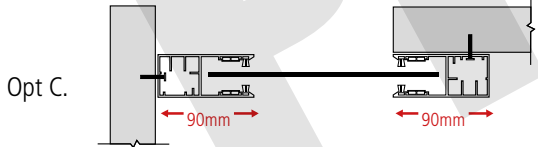

Undersize fix (where some of the guide track will be into the opening)

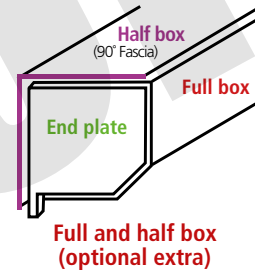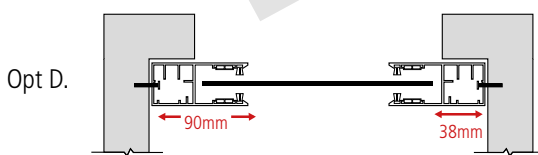

Full and half box (optional extra)

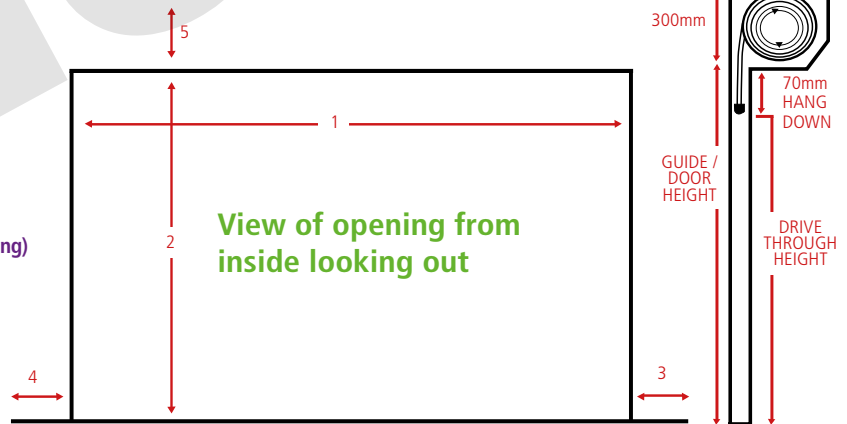

View of opening from inside looking out

- 1 mm. Brick to brick width (must be measured at narrowest point for reveal fix option).
- 2 mm. Floor to underside of lintel.
- 3 mm. Clear space available on back of brick / block pillar. If no space available and will be reveal fix please write zero in box 3.
- 4 mm. Clear space available on back of brick / block pillar. If no space available and will be reveal fix please write zero in box 4.
- 5 mm. Headroom between underside of lintel and lowest point of ceiling / joist.

Fitting option. (Opt A, Opt B, Opt C, Opt D).

Preferred side of motor, viewed from inside garage: Motor left Motor right Please tick / click box

Door colour: Without Box Half Box Full Box Please tick / click box
(90° Fascia)